

MARION COUNTY SURVEYOR'S OFFICE


SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 11 TWN. 15_N RNG. 4_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 10-13-09
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Harrison EDM Ties
Method of Establishment: County: 11/5/1999
IN S.P.C. E Zone, NAD 83
Name: 15041105
N: 501 076.266 3(m)
E: 66 760.699 9(m)

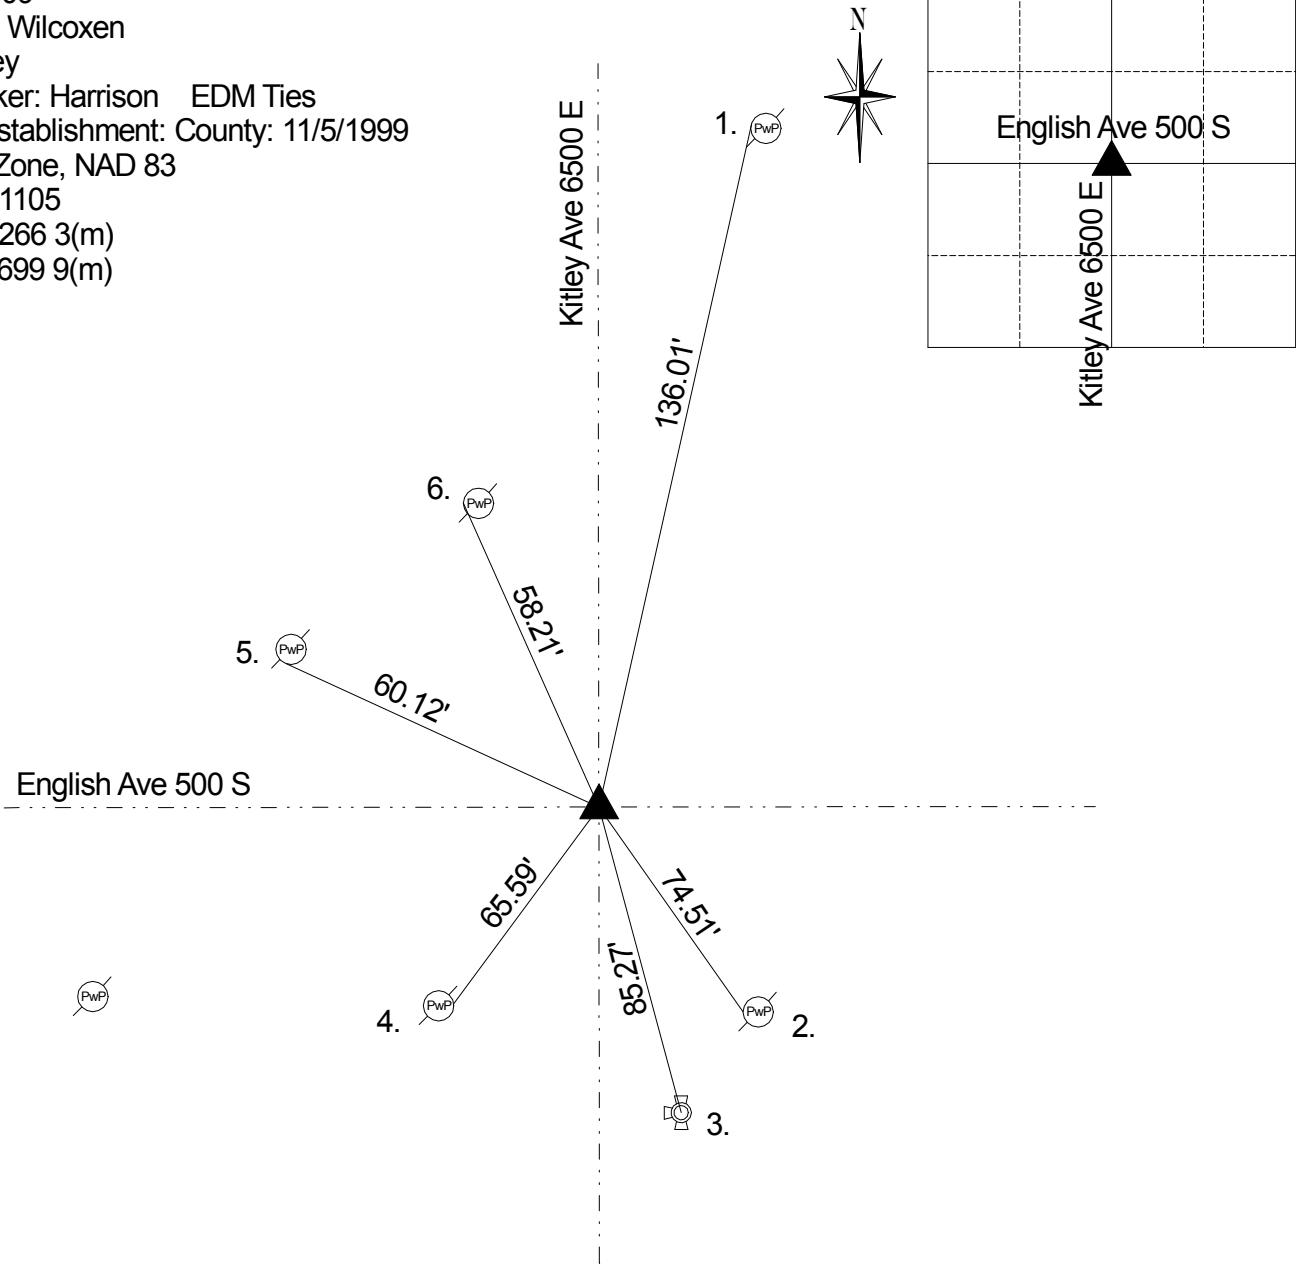

A survey by Hasbrook on February 28, 1860 indicates a set rock with no witnesses (Warren Legal Book p. 21). MCSO on 10/12/1945 and called a stone down 2". Monroe on 5/9/57 called a stone. Scherschel on 5/15/63 called a stone. McLand on 7/2/70 called a stone 10" down. Wilcoxen on 9/8/75 called a PK nail. Jacobs on 10/20/88 called a PK nail. Kiste on 10/19/84 called a PK nail. Wilcoxen on 12/14/98 called a PK nail. Corner was excavated by Wilcoxen on 9/17/99 and a R.R. spike was found 6" down. A stone was found 18" down. A #205 cast iron Harrison Monument was set in position of the stone. Wilcoxen on 11/5/1999 called a Harrison Monument. Wilcoxen on 5/8/2004 called a Harrison Monument. Retied 10/13/09 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	136.01'	PK nail W PwP #4-547 B 24" up
2.	74.51'	Mag nail w/brass washer W PwP #23-577 A 10" up
3.	85.27'	Top nut of fire hydrant
4.	65.59'	PK nail E PwP #219-576 A 15" up
5.	60.12'	Mag nail w/brass washer S PwP no # 12" up
6.	58.21'	Mag nail w/brass washer W PwP #199-546 B 12" up

THIS CORNER POSITION
REPRESENTS A "TITLE" CORNER
AND MAY NOT NECESSARILY
REPRESENT THE POSITION BASED
ON RECORD CORNERS.